


*Make  
A Difference*



## **FIRE FIGHTING PUMPS FIRE HYDRANT SYSTEM**






**HMQ-MIX FLOW MODEL**

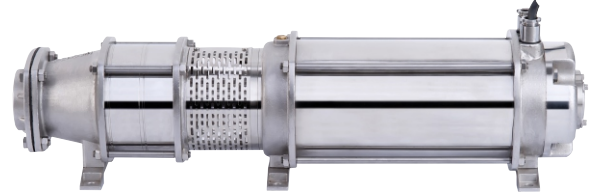

**HMQ-REDIAL FLOW MODEL**

Ordinary cast iron pump does not start in the fire accident after long time due to rust stop the pump. But if you install Penguin Pumps made new fully stainless steel 304 fire fighting pump then pump very easily start after long time in the fire accident condition because stainless steel does not rust.



**Fire Hydrant valves**



**Get Rid Of Your Old Fire Fighter Pumps, Adopt Our Fully Stainless Steel Fire Fighting Pumps.**


**Who Made First in INDIA of New Design Fire Fighter Pumps.**

**There Doesn't Require Like Jockey Or Other Pumps. Our Penguin Fire Fighting Pumps Good Enough For Your Fire System.**

**Easy Fitting & Installation & it's became Innovation Your Fire Fighting System.**



## FIRE FIGHTING PUMPS FIRE HYDRANT SYSTEM

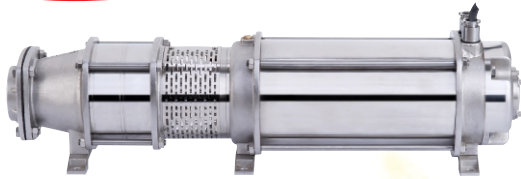

**HZM-REDIAL FLOW MODEL**



**HZMQ-MIX FLOW MODEL**

### APPLICATION : -

Fire Fighting, High Rise Building & Rural Water Supply, Sprinkler Irrigation, Sea Water Supply, Irrigation, Fish Breeding farms, Lake & Streams, Industrial Irrigation, Construction, Civil and Industrial Application, Heating - Cooling, Air Condition and Circulation Facilities, Caisson Well.

### SALIENT FEATURES : -

- Long Life, Energy Efficient Pumps.
- The Pump and Motor Components, Produced by Environments Chromium (304,316L).
- No Need Special Cabinet.
- Noise free silent operation, hence ideal for domestic use.
- easy installation & transportation because of its light weight.
- Runs At Depth Of 50cm , Rewindable Water Cooled Motor.
- Easy Essambly and Thisessambly.
- Provides Maximum Efficiency At Law Cost.

### TECHNICAL SPECIFICATION : -

Power Rage	5 H.P. To 50 H.P. Three Phase,
Speed	2820 RPM
Version	A. C. Supply, 350 - 415 Volt 50 HZ. Star Delta Or 60 Hz.
Type Of Duty	S1
Flow / Discharge	115 To 2650 LPM ( Liter Per Minutes )
Head Range	36 Meter To 162 Meter
Nominal Outlet Size	65MM, 80MM, 100MM
Maximum Liquid Temperature	33 ' C

**PENGUIN PUMPS**

Mfg. : Fire Fighting Pumps

4-Samrat Ind. Area, B/h. Ban Lab, Gondal Road,  
Rajkot- 360 004. (Guj.) Tele/Fax : +91-281-2363838  
Mo.+91 99099 19585 ,Web : www.penguinpumps.in  
E-mail : sse.penguinpumps81@gmail.com